

RigiFlex™

Semi-rigid dryer transition duct



LISTED
2158A



Fire resistant
Crush resistant
Puncture resistant

Material Specifications

RigiFlex™ is flexible, yet semi-rigid when extended. Virtually damage resistant, RigiFlex™ is comprised of 5 layers of 25 micron aluminum (a total of 125 micron) using 1mm steel wire. Existing non-UL approved semi-rigid duct on the market is 80 to 100 microns.

Simple & Easy

The unused portion can easily be compressed at the wall vent exhaust end for a precise fit. RigiFlex™ will always retain its installed size and shape.




More Features & Benefits

- Fully flexible while retaining its shape
- No polyester or aluminum/polyester laminates
- Small footprint for shipping and retail shelves
- Easily extends to manufacturer's FULL stated length
- Provides maximum air flow
- Class 0 (for flame spread or smoke development)
- Easy, safe access for maintenance and lint removal
- No sharp edges
- Does not unravel at ends

BEFORE
(without RigiFlex™)

AFTER
(RigiFlex™ installed)

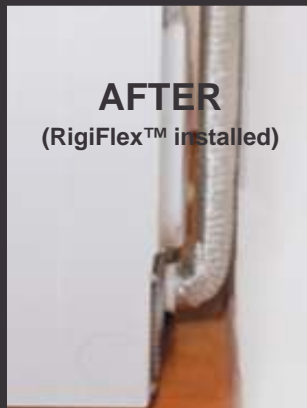

Installing RigiFlex™



Installs in minutes using optional plastic Click&Quick™ connectors using NO tools, clamps, or ties.



Space-saving Square duct available